

PRODUCT DATA SHEET

SikaMelt®-678

Polyurethane Hot Melt for assembly operations

TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Chemical base	Polyurethane
Colour (CQP001-1)	White – beige, opaque
Cure mechanism	Moisture curing
Density (uncured)	1.2 kg/l
Viscosity (by Brookfield)	at 130 °C 9 000 mPa·s
Softening temperature (CQP538-5)	72 °C
Application temperature	110 – 140 °C Short term max. 1h 150 °C ^A
Open time (CQP559-1)	Medium
Curing time (CQP558-1)	10 h
Green strength (CQP557-1)	1.2 MPa
Shore D hardness (CQP023-1 / ISO 48-4)	40
Shelf life	9 months

CQP = Corporate Quality Procedure

A) Only valid for nozzle

DESCRIPTION

SikaMelt®-678 is a reactive polyurethane hot melt adhesive. It cures on exposure to atmospheric humidity. Due to its long open time SikaMelt®-678 is in particular suitable for assembly application.

PRODUCT BENEFITS

- Long open time for assembly (bead application)
- Very high green strength also under warm conditions
- Good adhesion on metals and polar plastics

AREAS OF APPLICATION

SikaMelt®-678 is suitable for permanent bonding of polar plastics as well as for wood, foam, textiles, painted and primed steel. Non polar plastics like PP and PE can be bonded after proper physical pretreatment.

SikaMelt®-678 can be used for Automotive interior assembly applications, where a high initial temperature resistance is required because of elevated temperature in the working environment.

This product is suitable for experienced professional users only. Tests with actual substrates and conditions have to be performed ensuring adhesion and material compatibility.

CURE MECHANISM

SikaMelt®-678 cures by reaction with atmospheric moisture. At low temperatures the water content in the air is lower, which will result in a lower curing speed (see diagram 1). When bonding hydrophobic (e.g. PP) and/or moisture impermeable substrates a significantly longer curing time has to be taken into account.

This applies especially on assembly applications with an adhesive thickness > 100 µm. For lamination applications of hydrophobic and/or moisture impermeable substrates the adhesive layer shall not exceed 100 µm. In such cases project related tests with original substrates and conditions are mandatory.

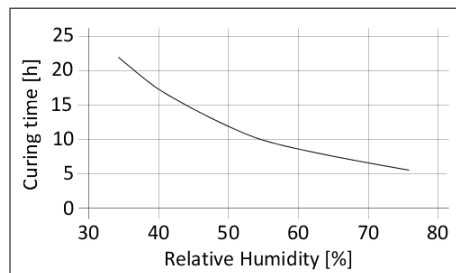


Diagram 1: Curing time for 500 µm film

CHEMICAL RESISTANCE

SikaMelt®-678 is resistant to aqueous surfactant, weak alkaline/acids solutions and temporarily resistant to fuels, solvents and mineral oils.

The chemical resistance is influenced by several factors such as chemical composition, concentration, period of exposure and temperature. Therefore a project related testing in case of chemical or thermal exposure is required.

METHOD OF APPLICATION

Surface Preparation

Surfaces must be clean, dry and free from grease, oil and dust.

Based on the surface and type of material, a physical or chemical pre-treatment might be required. Type of pre-treatment must be determined by preliminary tests.

For metals best results are achieved, if substrates are heated up between 40 °C and 60 °C prior the assembly process.

Application

With adequate processing equipment SikaMelt®-678 can be applied as film, dot, bead or spray application. For automated applications a suitable filter system is required. To meet the required application properties the adhesive viscosity can be adjusted by adapting the application temperature (see table Typical Product Data).

During breaks SikaMelt®-678 is to be processed as follows:

For breaks ≥ 1 h the heating needs to be lowered to 80 °C and for breaks ≥ 4 h the heating needs to be switched off.

To ensure a constant quality during the whole production process it is mandatory to protect the adhesive in the melting tank with nitrogen, carbon dioxide or dried air (to avoid possible reaction of the product with humidity). At breaks or shut downs dip nozzle in dried oil in order to prevent curing of the adhesive (avoid blockage).

For advice on selecting and setting up suitable processing equipment contact the System Engineering Department of Sika Industry.

Removal

Equipment and application tools can be cleaned with SikaMelt®-009. Cured material can be swelled with SikaMelt®-001 and needs to be removed mechanically (see also cleaning instruction).

Uncured SikaMelt®-678 may be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Hands and exposed skin have to be washed immediately using Sika® Cleaner-350H or a suitable industrial hand cleaner and water. Do not use solvents on skin.

STORAGE CONDITIONS

SikaMelt®-678 has to be stored at temperature below 30 °C in a dry place.

For transportation purposes, the storage temperature can be exceeded for a period of max. 2 weeks up to 60 °C.

FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- Cleaning Instruction

For SikaMelt® PUR reactive hot melt equipment

PACKAGING INFORMATION

Bag	2 kg
Pail	20 kg
Bag (cardboard)	22 kg

BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

HEALTH AND SAFETY INFORMATION

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

DISCLAIMER

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

PRODUCT DATA SHEET

SikaMelt®-678
Version 03.01 (10 - 2023), en_GB
013409636780001000

SIKA LIMITED

Watchmead
Welwyn Garden City
Hertfordshire, AL7 1BQ
Tel: 01707 394444
Web: www.sika.co.uk
Twitter: @SikaLimited

